




HDD Recycling Plants



- Slurry volume: 1000 to 4000 l/min
- High solids capacities
- Available in 5 standard sizes
- Compact units in containerized design

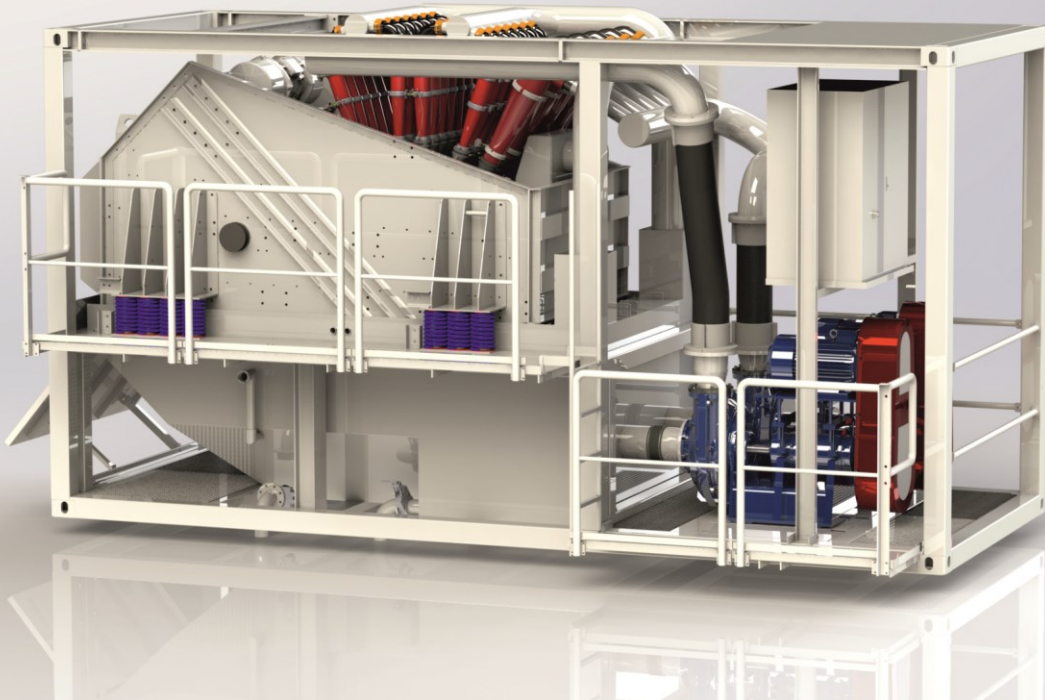



Key Benefits of MAB Recycling Plants in HDD

- Reduced disposal cost
- Fast rig up and rig down
- Long life screen design
- Wear protected centrifugal pumps
- Add-ons available for individual configuration

Product Data

	MAB 60 C HDD	MAB 75 C HDD	MAB 150 C HDD	MAB 220 C HDD	MAB 300 C HDD
Capacity (l/min)	1000	1250	2000	3000	4000
Capacity (m ³ /h)	60	75	150	220	300
Container Size (ft)	10	20	20	20	20
Cyclone Stages	2	2	2	2	2
1st Stage Hydrocyclone	1x PC 150 (6")	2x PC 150 (6")	3x PC 150 (6")	4x PC 150 (6")	5x PC 150 (6")
2nd Stage Hydrocyclone	6x PC 75 (3")	8x PC 75 (3")	14x PC 75 (3")	24x PC 75 (3")	28x PC 75 (3")
Total length (m)	2,991	6,058	6,058	6,058	6,058
Total width (m)	2,438	2,438	2,438	2,438	2,438
Total height (m)	3,100	3,100	3,200	3,195	3,195
Weight (t)	5,10	9,00	8,30	11,50	15,50

